

WALLY
≡

wallypower 50X



PETREL GLOBAL

Business Village-Block B 3d Floor, office 309-310, 221 Al Maktoum Rd, Dubai, UAE.
www.petrel-global.com, tel.: +971 52 821 6411

The **wallypower50**, which can act as a chase boat or standalone family cruiser, is a powerhouse of design, comfort on deck and below.





Start small,
live big







*Essentially
essential*



The **wallypower50** can also be specified with the wraparound fender of the wallytenders for those seeking more practical applications.

Let the journey begin

The closed cockpit provides space for inside/outside living in all weather conditions and the upper cockpit area provides ample seating for eight guests under the coachroof plus four more on two forward-facing bench seats.





Practicality
and style:

the best of
both worlds




Comfort with a view

Two separate sunbeds maximise the use of space on deck, particularly with the wings, creating an additional 6 square metres of aft deck space.





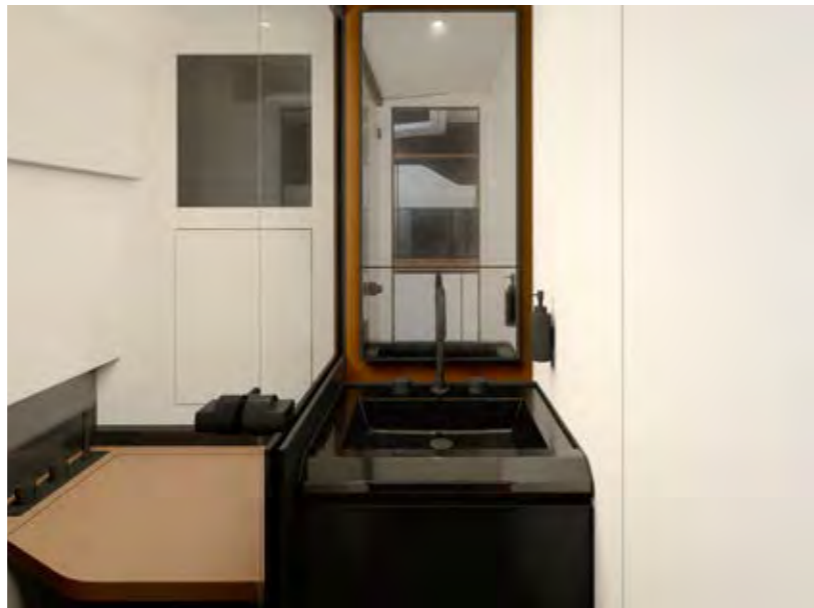

Below there is a large, open space that offers ultimate flexibility, plus a comfortable bathroom with separate shower, a large couch, and an inviting double bed. Complete with natural light from above and the optional additional Wally's Magic Portholes, below it's the perfect setting for a weekend getaway.







Serving looks,
innovation
and power



Top performance on water



The **wallypower50** comes also in the X version with quad 400hp Mercury outboards that deliver a scintillating ride at 48 knots while still offering a 240-nautical-mile range. If the optional Mercury 500hp Racing configuration is chosen, the **wallypower50X** can exceed 50 knots of maximum speed, with a range of 180 nautical miles.







wallypower50

Main technical specifications – PRELIMINARY DATA



TOP VIEW



MAIN DECK



LOWER DECK

Engines

2 x VOLVO PENTA IPS650 power 480 mhp / 353 kW at 3700 rpm

Speed (knots)

	VOLVO IPS 650	
Maximum speed	knots	36
Cruising speed	knots	30

Range (nautical miles)

	VOLVO IPS 650	
Maximum speed	n.m.	250
Cruising speed	n.m.	280

Main sizes

Loa = overall length (standard ISO 8666)	14,6	m.	47 ft. 11 in.
Lh = Hull length (standard ISO 8666)	14,6	m.	47 ft. 11 in.
Lwl = waterline length (boat fully laden)	13,4	m.	44 ft. 0 in.
Maximum beam	4,3	m.	14 ft. 1 in.
Depth under propellers (boat fully laden)	1,3	m.	4 ft. 1 in.
Displacement unladen	12,9	ton./lb.	28440
Displacement laden	16,2	ton./lb.	35715
Maximum number of persons on board	12		
Design category Directive 2013/53/EU	B		
Certification modules	B + F		RINA S.p.A.

Technical data

Hull type: warped hull with spray rails and aft deadrise	18	°	
H = Overall height	5,3	m.	17 ft. 3 in.
P = pulpit + transom	0,0	m.	0 ft. 0 in.
Fuel tank capacity	1400	lt./US gals.	370
Water tanks capacity	240	lt./US gals.	63

Performance specifications

The performance is estimated at the following conditions:

standard version displacement of the yacht: at 1/3 of load, clean hull, 25°C air temperature, good weather conditions, 4 persons on board	13,8	ton./lb.	30362
overloading the yacht by	0,5	ton./lb.	1102
top speed decreases of	1	knot	

The Technical data, performances, designs and graphic reproductions are purely indicative, are not contractual, shall not constitute in any circumstances whatsoever any contractual offer by the shipyard and refer to European standard models of motor yachts built by the shipyard. The only valid technical reference or description is the specific parameters of each motor yacht cited only on purchase of the same. Therefore the only indications binding on the seller are contained solely in the sale agreement and in the relevant specific manual.

wallypower50 X

Main technical specifications – PRELIMINARY DATA



TOP VIEW



MAIN DECK



LOWER DECK

Engines

4 x MERCURY VERADO V10 400 power 400 hp / 294 kW at 6400 rpm	std
4 x MERCURY VERADO V8 500R power 500 hp / 372 kW at 6600 rpm	opt

Speed (knots)

	VERADO 400HP		VERADO 500HP
Maximum speed	48	knots	54
Cruising speed	34	knots	36

Range (nautical miles)

	VERADO 400HP		VERADO 500HP
Maximum speed	240	n.m.	180
Cruising speed	330	n.m.	300

Main sizes

Loa = overall length (standard ISO 8666) (with opt fender +0,1m)	15,3	m.	50 ft. 2 in.
Lh = Hull length (standard ISO 8666)	14,4	m.	47 ft. 3 in.
Lwl = waterline length (boat fully laden)	13,4	m.	43 ft. 11 in.
Maximum beam (with opt fender +0,2m)	4,3	m.	14 ft. 1 in.
Depth under propellers (boat fully laden)	1,3	m.	4 ft. 1 in.
Displacement unladen	12,5	ton./lb.	27558
Displacement laden	16,3	ton./lb.	35971
Maximum number of persons on board	12		
Design category Directive 2013/53/EU	B		
Certification modules	B + F		RINA S.p.A.

Technical data

Hull type: warped hull with spray rails and aft deadrise	18	°	
H = Overall height	5,2	m.	17 ft. 0 in.
P = aft protrusion	0,9	m.	2 ft. 11 in.
Fuel tank capacity	2800	lt./US gals	740
Water tanks capacity	240	lt./US gals	63

Performance specifications

The performance is estimated at the following conditions:

standard version displacement of the yacht: at 1/3 of load, clean hull, 25°C air temperature, good weather conditions, 4 persons on board	13,6	ton./lb.	29892
overloading the yacht by	0,5	ton./lb.	1102
top speed decreases of	1	knot	

The Technical data, performances, designs and graphic reproductions are purely indicative, are not contractual, shall not constitute in any circumstances whatsoever any contractual offer by the shipyard and refer to European standard models of motor yachts built by the shipyard. The only valid technical reference or description is the specific parameters of each motor yacht cited only on purchase of the same. Therefore the only indications binding on the seller are contained solely in the sale agreement and in the relevant specific manual.

WALLY




PETREL GLOBAL

Business Village-Block B 3d Floor, office 309-310, 221 Al Maktoum Rd, Dubai, UAE.
www.petrel-global.com, tel.: +971 52 821 6411