




NALLY

 PETREL GLOBAL
 Business Village-Block B 3d Floor, office 309-310, 221 Al Maktoum Rd, Dubai, UAE.

 www.petrel-global.com., tel.: +971 52 821 6411



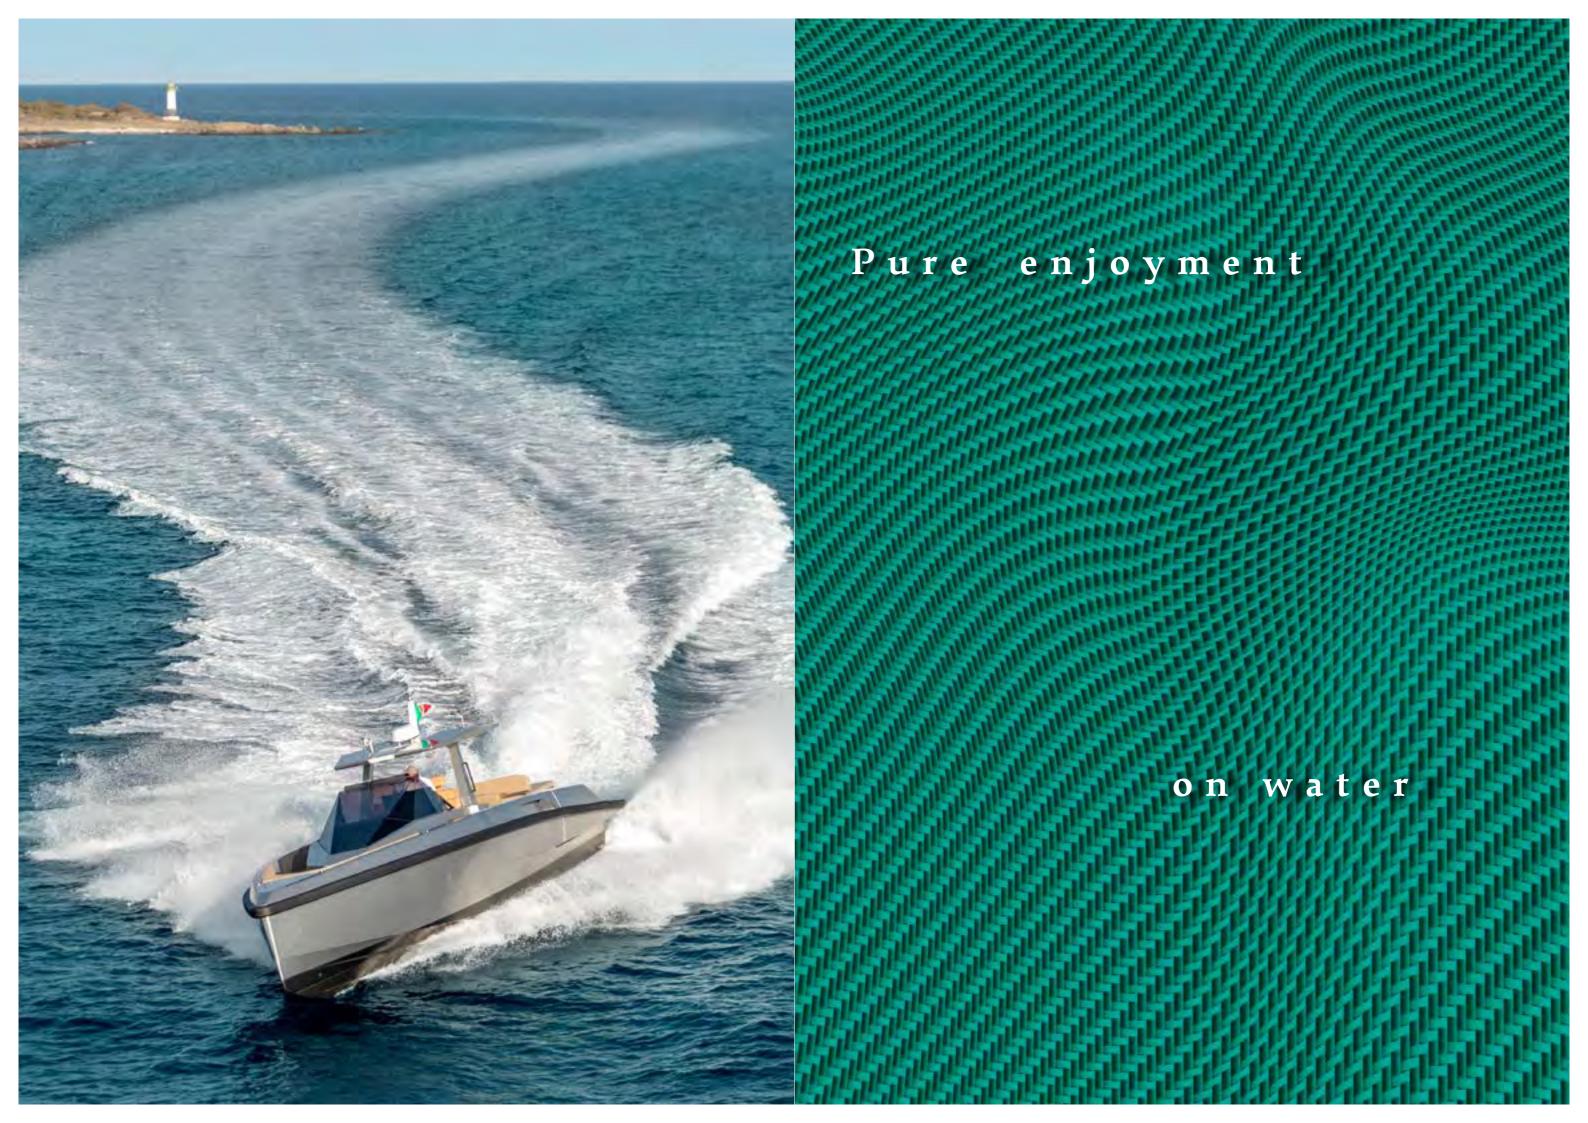



Deep secure bulwarks Windowed T-top for plenty of light







Carbon fiber helm station Super-equipped dashboard Multi-function display User-friendly joystick controls for easy manoevring and docking Ergonomic pilot and passenger seats










### Say hi to a super high-performance elegant outboard

For the outboard model, Wally selected Mercury's state-of-the-art 450 hp Verado R power engines.


The lightest and most fuel efficient outboard on the market, with the best power-to-weight ratio. Combined with a deep V-hull and light carbon fiber construction, the result is impressive: high top speed and very low consumptions for extended range. 54 knots of maximum speed and 36 knots of cruising speed with a range of 340nm.



Wave piercing vertical bow

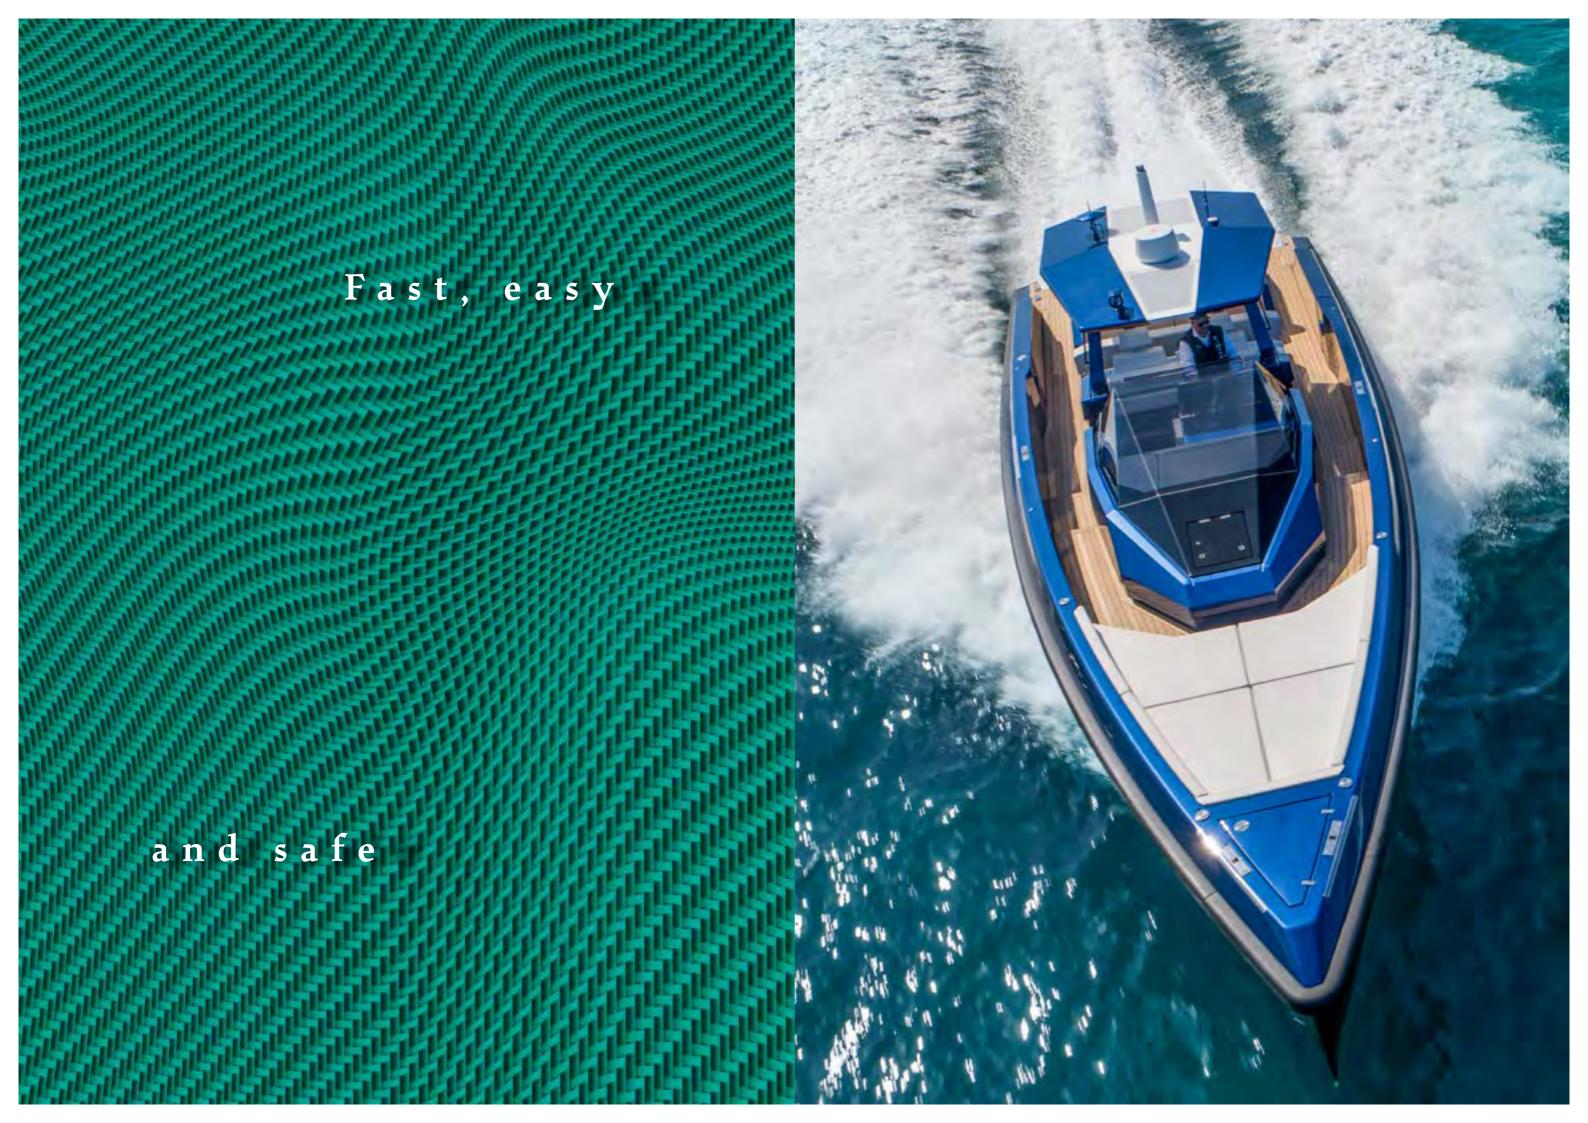



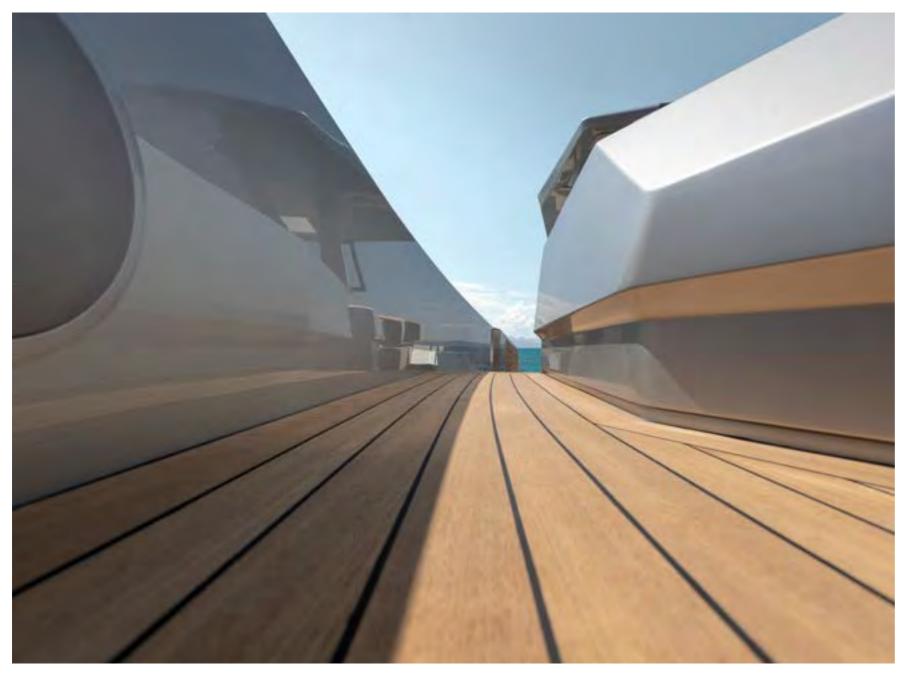







wallytender48 is a great family boat and safe for everybody onboard with protective bulwarks and non slip teak deck as standard.



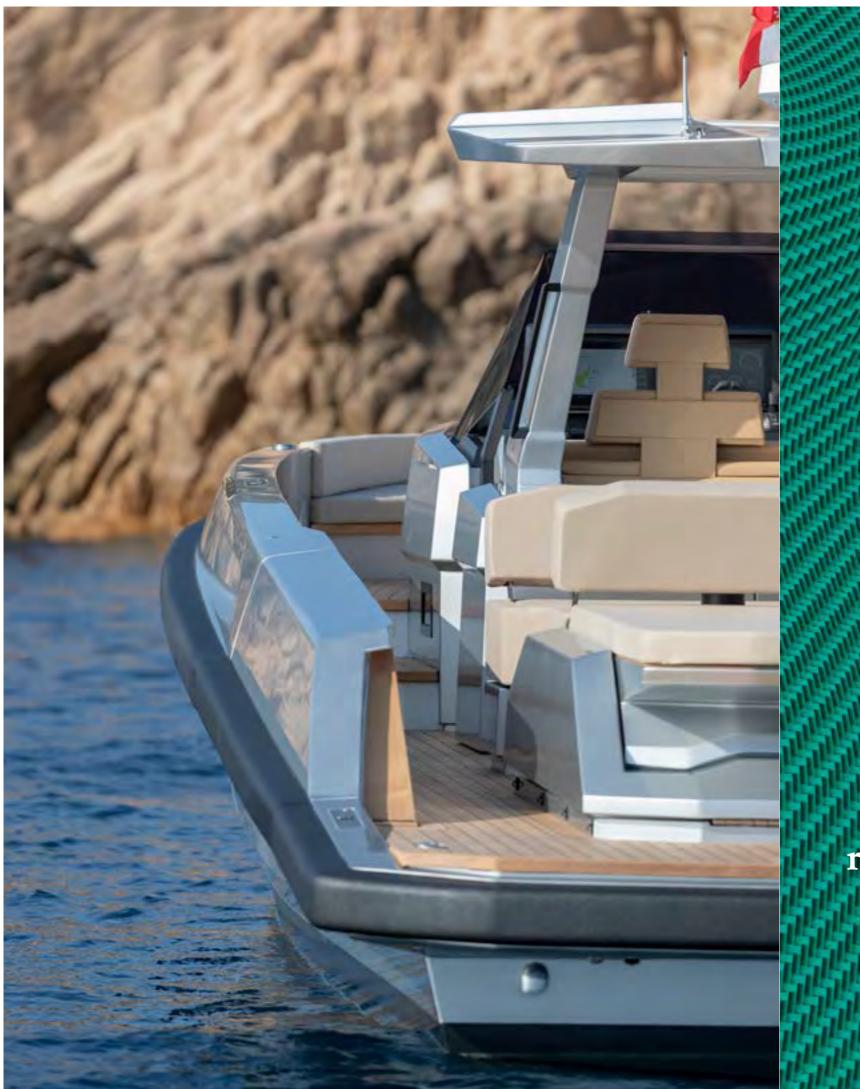

# feel "in"

rather than "on"

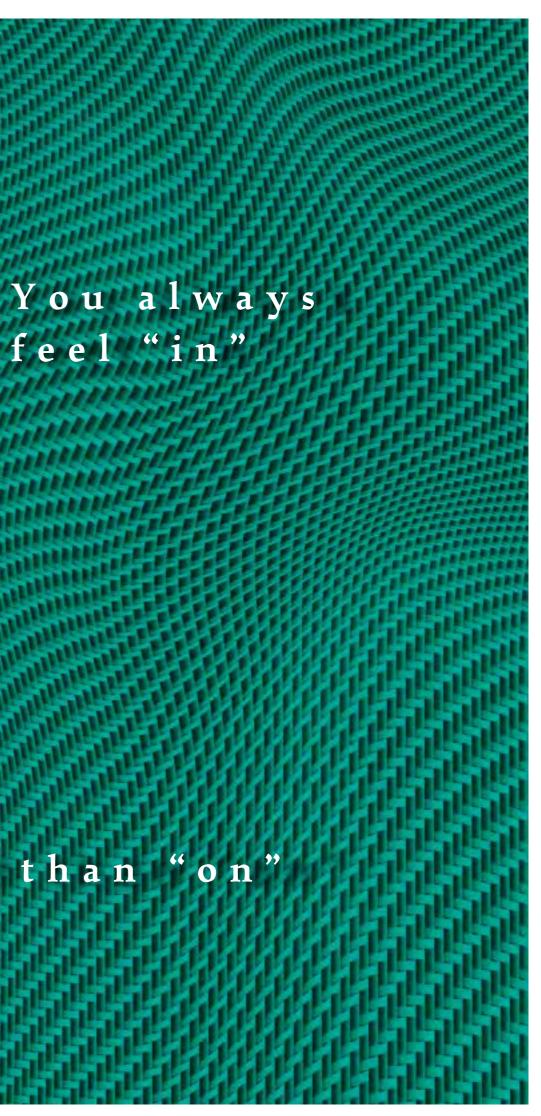










Full living deck, designed to let family and friends relax in convivial comfort with generous seating and sunbeds.



To fully enjoy the on-the-water experience both at anchor and underway, the aft seating can be configured to face either forward or the dining table.

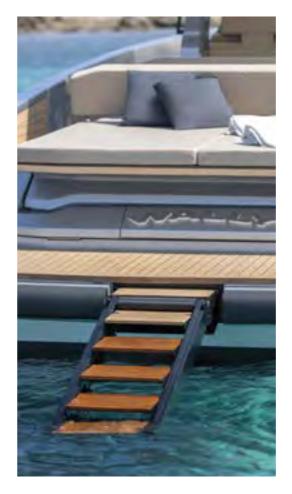





Galley unit on deck Opening bulwarks as standard Gyro stabiliser Wrap-around fender Push-button anchor system 8 people al fresco dining Toys garage with ample storage



### like no other







Under aft sunbed there is additional storage space. The entire aft sunbed can be raised to access the engine compartment.


In addition to the hardtop, both the fore deck and the aft deck can be protected from sun under awnings supported by carbon fiber pillars.








38 knots of speed

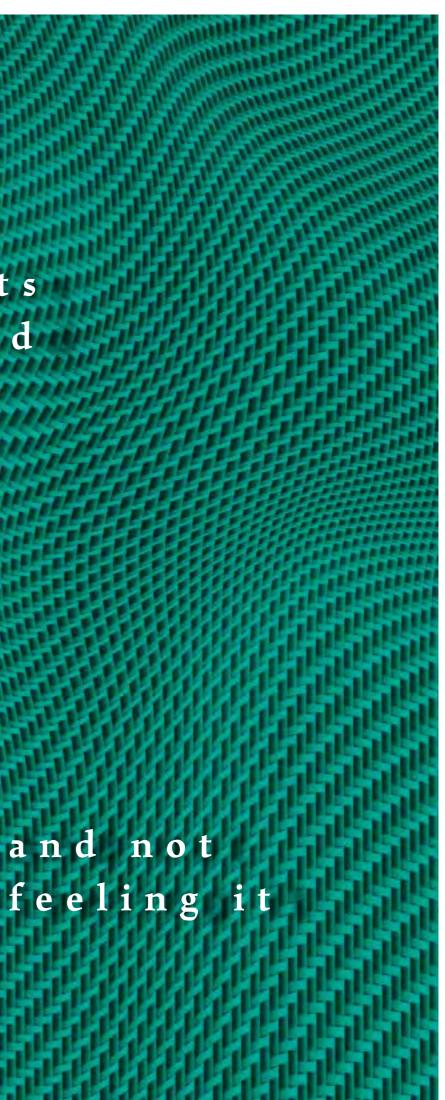





Wally has ingeniously split the four engines to the flanks of the boat, with two on each side, allowing the installation of the retractable hydraulic boarding passerelle/swim ladder to provide direct and easy access to the water or the shore.

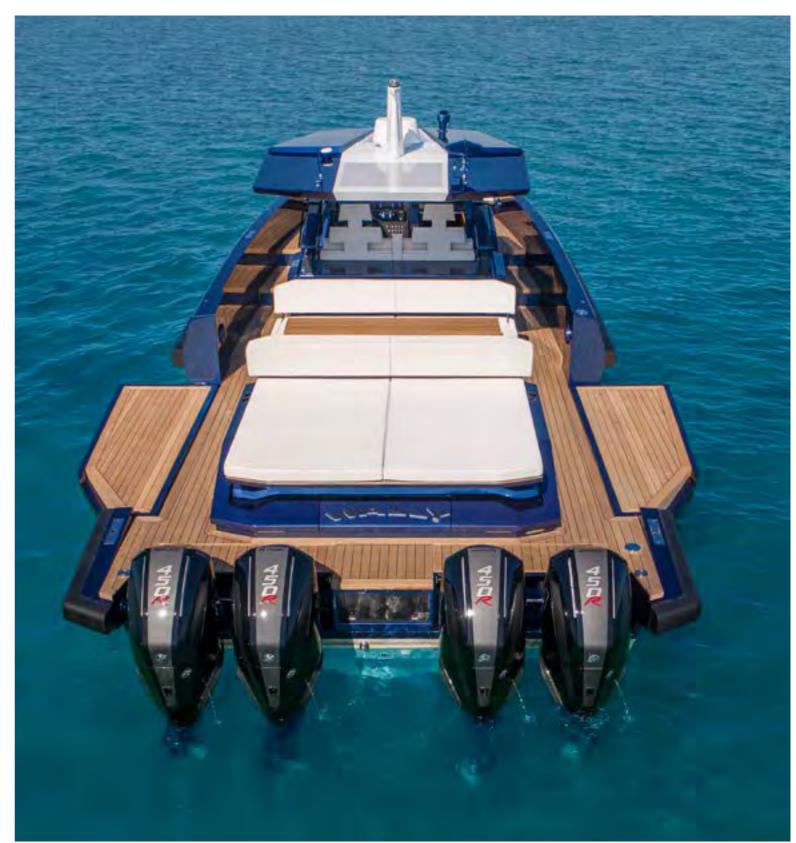










### Promoting open-air living

Because at the end of the day, this is the best way to be Wally





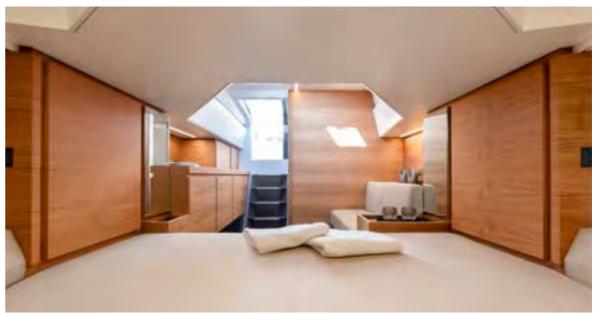

Spacious, bright, fully equipped and air-conditioned suite Single molded carbon floor Plenty of storage Refrigerator, microwave Custom designed carbon stair En-suite with separate shower



### wallytender48

Main technical specifications



The Technical data, performances, designs and graphic reproductions are purely indicative, are not contractual, shall not constitute in any circumstances whatsoever any contractual offer by the shipyard and refer to Europe an standard models of motor yachts built by the shipyard. The only valid technical reference or description is the specific parameters of each motor yacht cited only on purchase of the same. Therefore the only indications binding on the seller are contained solely in the sale agreement and in the relevant specific manual.

### Engines

2 x VOLVO PENTA IPS650

Maximum speed	
Cruising speed	

LOA = length overall (ISO 8666)			
LH = length hull (ISO 8666)			
LWL = length waterline (full load, standard version)			
Maximum beam			
Depth under propellers (full load, standard version)			
Displacement (light ship, standard version)			
Displacement (full load, standard version)			
Maximum number of persons on board			
Design category directive 2013/53/EU			
Certification modules			

Hull type: warped hull with spray rails and aft deadrise	
H = overall height	
P = pulpit + transom	
Fuel tank capacity	
Water tanks capacity	

2 x VOLVO PENTA IPS650		
Power at 3700 rpm	353 kW	480 mhp
Speed		
Maximum speed		38 knots
Cruising speed		32 knots
Range		
Maximum speed		280 nm
Cruising speed		310 nm
Main sizes		
LOA = length overall (ISO 8666)	14,5 m	47 ft 6 in
LH = length hull (ISO 8666)	14,4 m	47 ft 3 in
LWL = length waterline (full load, standard version)	13,4 m	44 ft 0 in
Maximum beam	4,4 m	14 ft 5 in
Depth under propellers (full load, standard version)	1,2 m	3 ft 11 in
Displacement (light ship, standard version)	11,5 t	25353 lb
Displacement (full load, standard version)	14,8 t	32628 lb
Maximum number of persons on board		12
Design category directive 2013/53/EU		В
Certification modules	B+F	RINA Spa
Technical data		
Hull type: warped hull with spray rails		18°
and aft deadrise		10
H = overall height	4,6 m	15 ft 1 in
P = pulpit + transom	0,1 m	0 ft 4 in
Fuel tank capacity	1400 l	370 US gal
Water tanks capacity	2401	63 US gal
Performance specifications		
The performance is estimated at the following conditions:		
Standard version displacement	12,4 t	27276 lb
at 1/3 of load clean hull 25°C air tomporature		
at 1/3 of load, clean hull, 25°C air temperature, good weather conditions, 4 persons on board		
Overloading the yacht by	0,5 t	1102 lb
	0,51	1102 10

Top speed decreases of

1 knot

## wallytender48

### wallytender48X

Main technical specifications



The Technical data, performances, designs and graphic reproductions are purely indicative, are not contractual, shall not constitute in any circumstances whatsoever any contractual offer by the shipyard and refer to Europe an standard models of motor yachts built by the shipyard. The only valid technical reference or description is the specific parameters of each motor yacht cited only on purchase of the same. Therefore the only indications binding on the seller are contained solely in the sale agreement and in the relevant specific manual.

### Engines

4 x MERCURY VERADO V8 450R

Maximum speed	
Cruising speed	

LOA = length overall (ISO 8666)			
LH = length hull (ISO 8666)			
LWL = length waterline (full load, standard version)			
Maximum beam			
Depth under propellers (full load, standard version)			
Displacement (light ship, standard version)			
Displacement (full load, standard version)			
Maximum number of persons on board			
Design category directive 2013/53/EU			
Certification modules			

Hull type: warped hull with spray rails and aft deadrise
H = overall height
P = pulpit + transom
Fuel tank capacity
Water tanks capacity

336 kW	450 mhp
	54 knots
	36 knots
	200 nm
	340 nm
14,9 m	48 ft 11 in
14,2 m	46 ft 7 in
13,4 m	43 ft 11 in
4,4 m	14 ft 5 in
1,1 m	3 ft 6 in
11,1 t	24394 lb
14,3 t	31526 lb
	12
	В
B+F	RINA Spa
	18°
4,5 m	14 ft 9 in
0,7 m	2 ft 4 in
28001	740 US gal
2401	63 US gal
12,3 t	27181 lb
0,5 t	1102 lb
	1 knot
	14,9 m 14,2 m 13,4 m 4,4 m 11,1 m 11,1 t 14,3 t B+F 4,5 m 0,7 m 2800 1 240 1 12,3 t

